

Klüberplus S 07-100, -100 M2, -100 M4

Gel for facilitated assembly of elastomer and plastic components



Your benefits at a glance

- Cost savings due to shorter assembly times and reduction of rejects due to lower assembly forces
- Environmentally friendly and safe to use
 - Lower consumption of chemicals due to excellent temporary lubricating effect
 - Non-flammable, water-based concept - without solvent or mineral oils
 - Prevents workplace injuries due to less force required for assembly
- Neutral towards many materials, including EPDM, NBR, FKM, VMQ, ACM
- Optimised wetting of materials with low surface tension (e.g. FKM, VMQ)
- Offers full protection against corrosion once water content has fully evaporated

Your requirements - our solution

When joining or assembling rubber-elastic materials, it is particularly important that the components can be fitted perfectly without excessive force. Ill-fitting or damaged surfaces are frequently the result of less than optimal assembly lubrication, e.g. by mineral-oil-based products, soap solutions, water or silicones. In the application, this may become apparent in the form of corrosion, poor compatibility, impaired wetting of elastomers or residues.

As products matching precisely these applications we developed Klüberplus S 07-100, -100 M2, and -100 M4. During assembly, these products generate a temporary lubricating effect that makes the components fit into each other smoothly. As assembly forces are evidently up to 75 % lower, the amount of reject can be reduced and the production rate increased. As the water evaporates, the product ceases to act as a lubricant, so the component is fixed firmly in place. Klüberplus S 07-100, -100 M2 and -100 M4 offer you a wide variety of uses as they are neutral towards most customary materials. No matter if in wet or dry condition, the water-based product does not encourage corrosion.

The Klüberplus S 07 series is available in three ready-to-use viscosity variants. Owing to the gel-like texture of Klüberplus S 07-100, this product adheres well to the assembled component, so overhead application is easily possible with the workplace remaining clean. Klüberplus S 07-100 M2 and 100 M4 are ready-to-use emulsions with a lower viscosity. They are therefore preferably used for immersion or spray application, or generally in applications where a lower viscosity is required.

Application

The Klüberplus S 07 series was developed to have a temporary lubricant for joining and assembly processes involving rubber-elastic materials and plastic components. The product concept has proven

particularly successful in profile seals, shaft seals, rubber sleeves and O-rings in the automotive industry. It may, however, also be used in many other industries and applications involving the joining and assembly of rubber-elastic components.

Application examples:

- O-rings
- Membranes, bushings
- Radial shaft seals (RSS) on shafts and in casings
- Cover caps (e.g. for gear shafts)
- Profile seals, e.g. for doors, windows, crankshaft casings
- Stopper and fixing elements
- Sealing elements, moulded rubber parts
- Hoses (e.g. brake fluid, cooling fluid and fuel hoses)
- Steering column boots
- Bellows
- Exhaust system hangers
- Tyres
- Headlamp/tail lamp and lighting assemblies

As well as many other rubber or soft plastic parts

Application notes

The Klüberplus S 07 series shows good stability and no tendency to separation even after prolonged storage. Stirring is therefore not required prior to use. The products' viscosity can be reduced by dilution with water. Once diluted, the product should be used up completely without delay. To prevent lime deposits on the component, we recommend using demineralised water.


Klüberplus S 07-100, -100 M2, -100 M4

Gel for facilitated assembly of elastomer and plastic components



Protect from frost. If frozen let the product thaw at room temperature. Due to the variety of materials, compatibility with the component should be checked under conditions similar to series application.

Klüberplus S 07-100, -100 M2, and -100 M4 are ready-to-use products for application by brush, sponge, squeeze bottle or immersion. If required, you can order a re-usable drain cock for our 20 kg canister to facilitate the metering and handling of the product series.

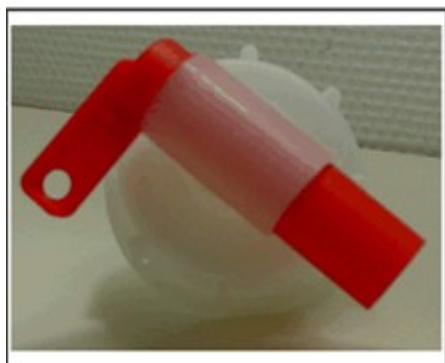

Material safety data sheets

Material safety data sheets can be requested via our website www.klueber.com. You may also obtain them through your contact person at Klüber Lubrication.

Pack sizes	Klüberplus S 07-100	Klüberplus S 07-100 M2	Klüberplus S 07-100 M4
Can 1 kg	+	+	+
Can 5 kg	+	+	+
Canister 20 kg	+	+	+

Characteristics	Klüberplus S 07-100	Klüberplus S 07-100 M2	Klüberplus S 07-100 M4
Article number	012379	012380	012381
Colour space	white	white	white
Density, Klüber method: PN 024, 20°C	approx. 1.00 g/cm ³	approx. 1.00 g/cm ³	approx. 1.00 g/cm ³
pH-value, DIN ISO 976	approx. 8.5	approx. 8.5	approx. 8.5
Kinematic viscosity, DIN EN ISO 3104 / DIN 51562-1 / ASTM D445 / ASTM D7042, 40°C	approx. 1400 mm ² /s	approx. 75 mm ² /s	approx. 13 mm ² /s
Minimum shelf life from the date of manufacture - in a dry, frost-free place and in the unopened original container, approx.	12 months	12 months	12 months

Klüberplus S 07-100, -100 M2, -100 M4

Gel for facilitated assembly of elastomer and plastic components



Klüber Lubrication – your global specialist

Innovative tribological solutions are our passion. Through personal contact and consultation, we help our customers to be successful worldwide, in all industries and markets. With our ambitious technical concepts and experienced, competent staff we have been fulfilling increasingly demanding requirements by manufacturing efficient high-performance lubricants for more than 90 years.

Klüber Lubrication München GmbH & Co. KG /
Geisenhausenerstraße 7 / 81379 München / Germany /
phone +49 89 7876-0 / fax +49 89 7876-333.

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

Publisher and Copyright: Klüber Lubrication München GmbH & Co. KG. Reprints, total or in part, are permitted only prior consultation with Klüber Lubrication München GmbH & Co. KG and if source is indicated and voucher copy is forwarded.